




G3-QF (Quadrafin)

Extruded brush pile seals

Soft silicone treated multifilament yarn on an extruded base. Guaranteed on centre pile, more suitable for machine insertion. With clear central and external fins for improved weather sealing of sliding windows and doors. Optional adhesive backing.

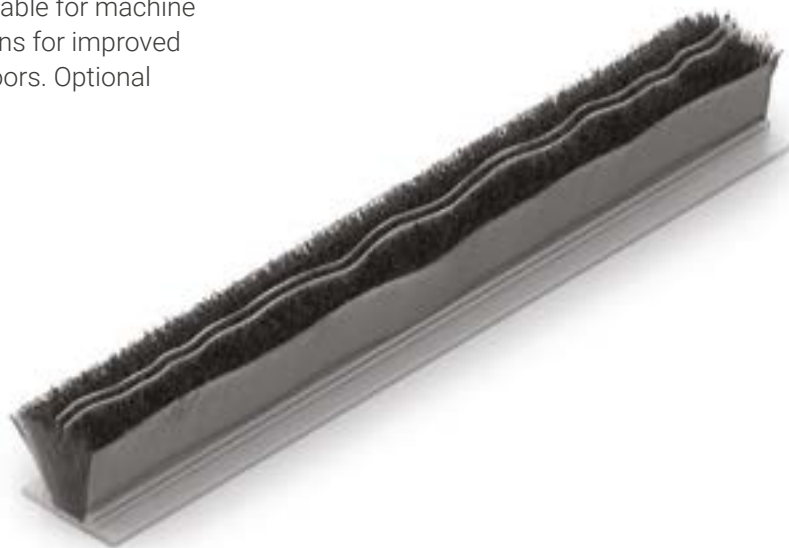

Dimensions			
	4.8	6.7	6.9
H	5.3	7.5	7.7
I	3.2	3.2	3.2
J	1.3	1.3	1.3
Minimum clearance recommended: +0.5 mm of backing width chosen			

Other dimension available with special conditions for minimum order quantities, lead time, packaging and price may apply						
Standard solutions						
A Backing width	B Backing thickness	C Directors width	D Directors height	E Brush height	F Central and outside Fin height* (≥ 6 mm)	G Brush density (P)
4.8 ± 0.2 mm	0.65 ± 0.1 mm	2.5 ± 0.2 mm	1.2 ± 0.2 mm	6 ≤ E ≤ 10 mm (+0.50/-0.50 mm with 0.50 mm intervals)	Level or E+1 mm (+0.50/-0.50 mm)	4P
6.7 ± 0.2 mm				10 ≤ E ≤ 12 mm (+0.50/-0.50 mm with 1 mm intervals)		
6.9 ± 0.2 mm						

*With standard black or grey non-woven (NW) silent fin

Colours	
Multifilament pile yarn colours	
Grey RAL 7045	Black RAL 9005

Other colours available with special conditions for minimum order quantities, lead time and price may apply.