




Angle-Pile (AP)

Extruded brush pile seals

Untreated monofilament yarn with extruded base. Available in 45° or 60° angles, Guaranteed on centre pile, more suitable for machine insertion. Predominantly applied in side guiding channels of rolling insect screens. Install single with softer standard pile, or double, to hold the screen mesh in the guides.



Dimensions		
	4.8	6.9
H	5.3	7.7
I	3.2	3.2
J	1.3	1.3
Minimum clearance recommended: +0.5 mm of backing width chosen		

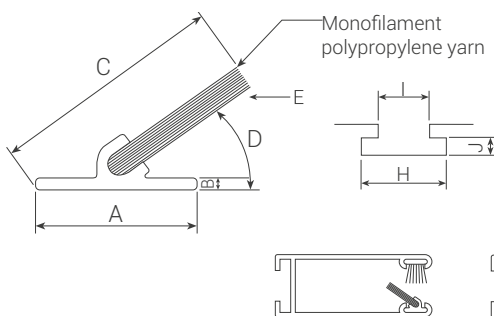

Other dimension available with special conditions for minimum order quantities, lead time, packaging and price may apply

Standard solutions				
A Carrier width	B Backing thickness	C Brush height	D Angles	E Brush density
4.8 ± 0.2 mm 6.9 ± 0.2 mm	0.65 ± 0.15 mm	9.0 ≤ D ≤ 12.0 + 0.5 mm with 0.50 mm intervals 12.0 < C ≤ 25.0 + 0.5 mm with 1.0 mm intervals	45 ± 5° 60 ± 5°	24

Colours	
Multifilament pile yarn colours	
Black RAL 9005	Grey RAL 7045