




G3

Extruded brush pile seals

Soft silicone treated multifilament yarn on an extruded base.
Guaranteed on centre pile, more suitable for machine insertion.
With clear central fin for improved weather
sealing of sliding windows and doors.
Optional adhesive backing.

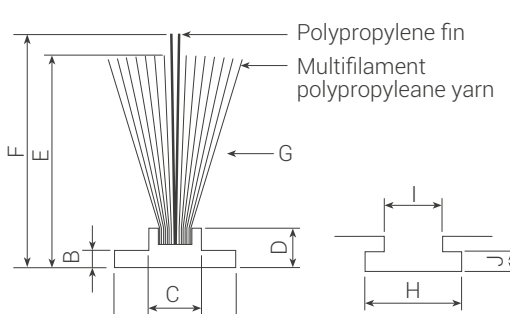

Dimensions						
	4.8	6.7	6.9			
H	5.3	7.5	7.7			
I	3.2	3.2	3.2			
J	1.3	1.3	1.3			
Minimum clearance recommended: +0.5 mm of backing width chosen						
Other dimension available with special conditions for minimum order quantities, lead time, packaging and price may apply						
Standard solutions						
A Backing width	B Backing thickness	C Directors width	D Directors height	E Brush height	F Fin height* (≥ 5 mm)	G Brush density (P)
4.8 ± 0.2 mm 6.7 ± 0.2 mm 6.9 ± 0.2 mm	0.65 ± 0.1 mm	2.5 ± 0.3 mm	2.3 ± 0.2 mm	4 ≤ E ≤ 5 mm (+0.50/-0.50 mm) with 0.50 mm intervals	E+1 mm (+0.50/-0.50 mm)	4P
				5.5 ≤ E ≤ 8 mm (+0.50/-0.50 mm) with 0.50 mm intervals	Level or E+1 mm (+0.50/-0.50 mm)	
				8 ≤ E ≤ 12 mm (+0.50/-0.50 mm) with 1 mm intervals		
				12 ≤ E ≤ 20 mm (+0.50/-0.50 mm) with 1 mm intervals	Level fin only (+0.50/-0.50 mm)	

*With optional black non-woven (NW) silent fin

Colours	
Multifilament pile yarn colours	
Grey RAL 7045	Black RAL 9005

Other colours available with special conditions for minimum order quantities, lead time and price may apply.