

# Schlegel Weather Seal Range




Technical Data Sheet  
Product = Aquamac 4992

Testing undertaken to ISO 9001/2000; BSI Registration FM15052 (since 29/07/1992)

Specification			
Characteristic	Value	Units	Test Method
<b>ACLD</b> (Aged Compression Load Deflection)	8.0 – 16 N/100mm	Newtons	In House
<b>Compression Set</b>	>20% set after 24hours (50% compression) @ 70°C	% Recovery mm	In House
<b>Dimensions</b>	See Detail below	mm	In House

## Drawing Detail

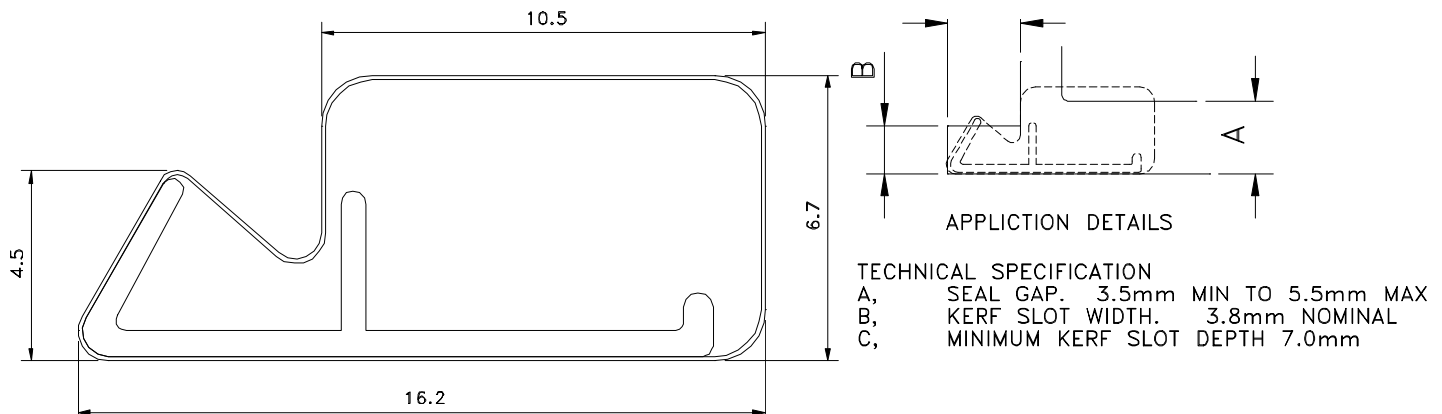

## Material / Components

Exterior Liner = Poly-ethylene  
 Exterior Liner Melt Index = approx. 0,85 g/10 min at 190 °C., 2,16 kg mass – 2.0MI  
 Hard Foot / insert = Poly-propylene  
 Foam Core = H/R Poly-Urethane

## Nominal Value of Thermal Conductivity

Low density P.E (used for the outer skin) is advised at 0.33 W/mKelvin  
 P.U.foam at a density of 70Kg / cubic mtr having a conductivity of 0.05 W/mKelvin  
*A proposed nominal value for all our seals = 0.06W/mKelvin.*

## Nominal Values for Sound Reduction Weighting

$R_w(C, C_{tr}) = 32 (-1; -3)dB$   
 $R_w(C, C_{tr}) = 22 (-1; -1)dB$   
 $R_w(C, C_{tr}) = 16 (-1; 0)dB$   
 $R_w(C, C_{tr}) = 29 (0; -2)dB$

*All information is nominal and may change without notice*

Schlegel UK, Henlow Industrial Estate, Henlow Camp, Bedfordshire, SG16 6DS

Phone: +44 1462 815500 Fax: +44 1462 811963

e:Mail: [schlegeluk@schlegel.eu.com](mailto:schlegeluk@schlegel.eu.com)

*This information is general and should not be taken as specific to the above seal*

## BBA Report

<b>CRITERIA</b>	<b>B.B.A. 345/1 1993</b>	<b>B.B.A. Report 1990</b>	<b>Comments</b>
TENSILE STRENGTH AFTER AGEING	< 25% REDUCTION AFTER 10 DAYS AT 70 <sup>0</sup> C	0% REDUCTION AFTER 28 DAYS	Q-Lon Exceeds the requirement
ELONGATION AT BREAK AFTER AGEING.	< 25% REDUCTION	> 5% REDUCTION AFTER 28 DAYS.	Q-Lon Exceeds the requirement
HARDNESS CHANGE AFTER AGEING	< 25% REDUCTION AFTER 10 DAYS AT 70 <sup>0</sup> C	COMPRESSION FORCE CHANGED BY 5% AFTER 28 DAYS	Q-Lon Exceeds the requirement
TEAR RESISTANCE	RAW MATERIAL TEST ONLY	NO ASSESSMENT	
DEFLECTION RECOVERY 24HRS @ 23 <sup>0</sup> C	> 75% RECOVERY	91.67% RECOVERY @ 70 <sup>0</sup> C	Q-Lon Exceeds the requirement
24hrs @ -15 <sup>0</sup> C	> 75% RECOVERY (LESS THAN 25% SET	100% RECOVERY	
14DAYS @ 55 <sup>0</sup> C	>25% RECOVERY	NOT ASSESSED	
OZONE RESISTANCE		NOT ASSESSED & NOT AFFECTED BY OZONE	This criteria is a limitation of Rubber / E.P.D.M.
DIMENSIONAL STABILITY	HEAT REVERSION < 2%	DIMENSIONAL STABILITY 0.01%	Q-Lon Exceeds the requirement

The B.P.F. have reviewed the 345/1 document and have published a revision. The revisions take account of current European draft standards for seals and will most likely include the following changes.

1. Test methods will not be limited to raw material assessment.
2. The test methods will allow the seal performance to be graded as opposed to minimum levels being specified. The system is intended to allow an appropriate seal to be specified for an application. Minimum performances are still assessed via the functionality tests of the complete window / door unit.

## Packaging Specification

**UK Card packing; 2 Coils per box; Nominal 200m / Coil**

**Coil = 825 OD – 425 ID; Box = 710\*710\*380mm**

02349912	AQ 4992 (121) BLK 200M	CL	200
02349914	AQ 4992 (121) (D) BRZ 200M	CL	200
02349920	AQ 4992 WHT 200M.	CL	200
02349921	AQ 4992 BRZ 200M.	CL	200
02349922	AQ 4992/121 BLK 200M	CL	200
02349923	AQ 4992/121 WHT 200M	CL	200
02349924	AQ 4992 (121) BRZ 200M	CL	200

*All information is nominal and may change without notice*

Schlegel UK, Henlow Industrial Estate, Henlow Camp, Bedfordshire, SG16 6DS

Phone: +44 1462 815500 Fax: +44 1462 811963

e:Mail: [schlegeluk@schlegel.eu.com](mailto:schlegeluk@schlegel.eu.com)

## **Performance Benefits Summary**

**Excellent memory** – Returns to original shape after compression

**Stability** – Low/no stretch gained by GF internal cord or insert

**Easily compressed** – Low compression forces, Unaffected by temp variance (tested to -30oC to +70oC)

**Acoustic performance** – Independent testing and comparison data available

**Paint and Stain Proof** – Properties un-affected by standard paints and stains

**Stabilised** – Unaffected by rot, Fungi, UV light or Ozone.

**Colour** – Wide range of available options (bronze, white, black, greys, etc)

**Jointing** – Can be joined with silicone sealant or welded in situ'

**Patented.**

*All information is nominal and may change without notice*

Schlegel UK, Henlow Industrial Estate, Henlow Camp, Bedfordshire, SG16 6DS

Phone: +44 1462 815500 Fax: +44 1462 811963

e:Mail: [schlegeluk@schlegel.eu.com](mailto:schlegeluk@schlegel.eu.com)